


Cosmetic mirrors

17612019002 Cosmetic mirror

PRODUCT



DRAWING

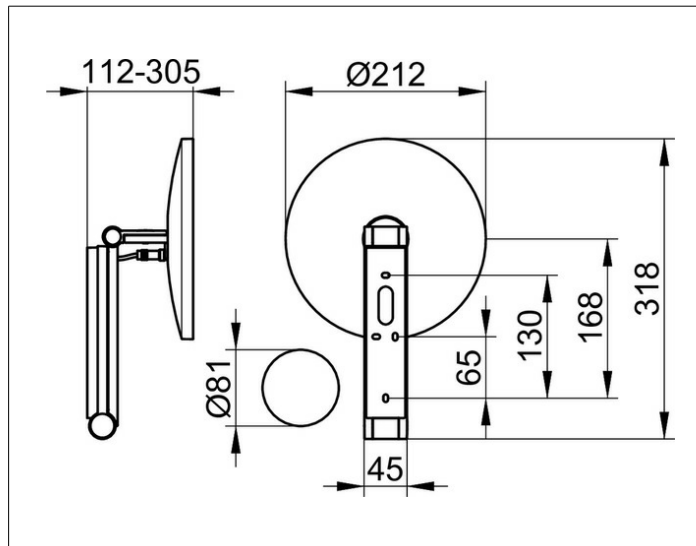

PRODUCT ATTRIBUTES

illuminated, 5-stage adjustable light colour from 2700 kelvin (warm white) to 6500 kelvin (daylight), glass control panel, in-wall cable layout, on pivoted rail adjustable in three dimensions, one-sided mirror, magnification factor x 5

Operation:

Glass control panel with capacitive touch sensor and LED display

Power supply:

Mains connection via wall socket, 12 V in-wall adapter, input 220-240 V, standby consumption: < 0,5 watt

Illumination:

LED 4,5 watt (lifespan > 50.000 hours)

EEK: D , 5 kWh/1000h

SURFACE

chrome-plated

DIMENSION

2 Lichtfarben, ohne Kabel

SPECIFICATIONS

KEUCO iLook_move cosmetic mirror, 17612019002

high quality cosmetic mirror, round,

chrome-plated, illuminated,

on pivoted rail,

wall-mounted surface with 4 fixing points

for optimal load distribution,

adjustable in three dimensions, one-sided mirror,

magnification factor x 5

Mains connection via wall socket,

12V in-wall adapter (included),

input 220-240 V in-wall cable layout,

Illumination: 1 x 4,5 Watt LED (maintance-free),

standby consumption: smaller 0,5 Watt,

high quality, easy to clean glass control panel

with capacitive touch sensor and LED display,

Light colours: 2700 Kelvin (warm white) – 6500 Kelvin (daylight),

5-stage adjustable light colour,

Height wall fixing 180 mm, width ca. 45 mm,

max. height ca. 500 mm,

outside diameter 212 mm, max. depth ca. 300 mm,

the cosmetic mirror is fixed concealed

delivery includes anti-corrosion fixings

Note:

Transformer to be housed in recessed function box (68mm)

Please go to www.keuco.de for detailed instructions and advise.