

**Plan blue**

**53926012321 Thermostatic mixer with head shower**

**PRODUCT**




**PRODUCT ATTRIBUTES**

exposed, safety cut-off at 38°,  
head shower height adjustable and swivelling,  
250 mm round (restricted flow rate 15 l/min.),  
hand shower with normal-, soft- and massage jet  
(restricted flow rate 12 l/min.),  
with shower bracket and shower hose 1600 mm,  
stop and diverter valve and mixing valve  
with ceramic sealing gaskets  
depth gauge 150 +/- 15 mm,  
hose connection DN 15,  
intrinsically safe against backflow  
suitable for water heaters

**SURFACE**

chrome-plated

**DRAWING**

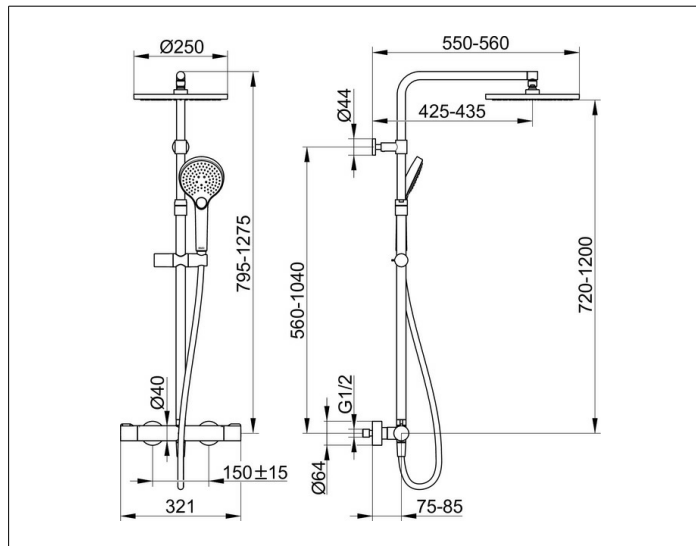

**SPECIFICATIONS**

KEUCO PLAN BLUE Thermostatic mixer for shower with head shower and hand shower 53926 012321

Consisting of:

- highgloss chrome-plated thermostatic mixer incl. stop and mixing valve with ceramic sealing gaskets and high-quality thermostatic cartridge, intrinsically safe against backflow, suitable for combination boilers,
- connection type: S-connections G1/2,
- hose connection G1/2,
- with temperature limiter,
- width of the fitting: 321mm
- projection of the fitting: max. 105mm
- gauge 150, tolerance class +/- 15 mm

- shower head round, diameter 250mm, connection type: G1/2, restricted flow rate 15l/min.

- 3 jet types: normal-, soft- and massage jet, switchable via push button, restricted flow rate 12l/min.

- hand shower bracket for hoses with conical nut

- shower holder for hoses with conical nut

- shower hose, length: 1600 mm

- shower set height adjustable (795 - 1.275mm) incl. wall mounting and fixing material