

**Plan blue**

**53926372321 Thermostatic mixer with head shower**

**PRODUCT**




**PRODUCT ATTRIBUTES**

exposed, safety cut-off at 38°,  
 head shower height adjustable and swivelling,  
 250 mm round (restricted flow rate 15 l/min.),  
 hand shower with normal-, soft- and massage jet  
 (restricted flow rate 12 l/min.),  
 with shower bracket and shower hose 1600 mm,  
 stop and diverter valve and mixing valve  
 with ceramic sealing gaskets  
 depth gauge 150 +/- 15 mm,  
 hose connection DN 15,  
 intrinsically safe against backflow  
 suitable for water heaters

**SURFACE**

black matt

**DRAWING**

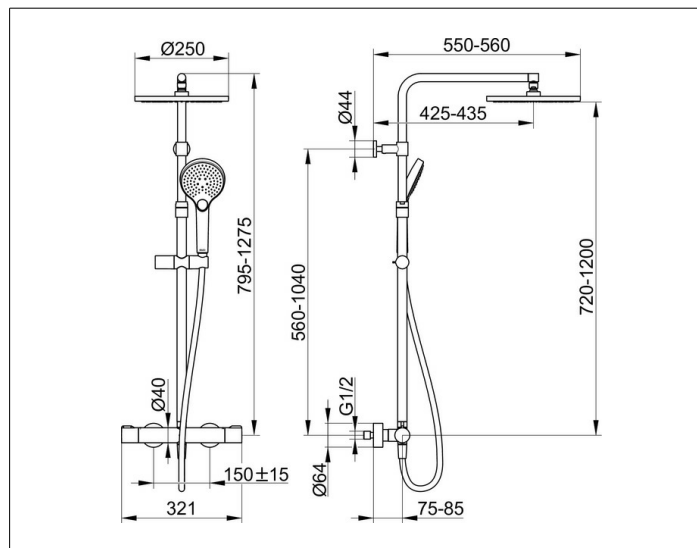

**SPECIFICATIONS**

KEUCO PLAN BLUE Thermostatic mixer for shower with head shower und Hand shower 53926 372321

Consisting of:

- Thermostatic mixer in black-matt surface incl. stop and mixing valve with ceramic sealing gaskets and high-quality thermostatic cartridge, intrinsically safe against backflow, suitable for combination boilers, connection type: S-connections G1/2, hose connection G1/2, with temperature limiter, width of the fitting: 321mm projection of the fitting: max. 105mm gauge 150, tolerance class +/- 15 mm

- Shower head round in black-matt surface, diameter 250mm, connection type: G1/2, restricted flow rate 15l/min.

- Hand shower in black-matt surface with 3 jet types: normal-, soft- and massage jet, switchable via push button, restricted flow rate 12l/min.

- hand shower bracket for hoses with conical nut

- shower bracket hoses with conical nut

- shower hose, length: 1600 mm

- Shower set height adjustable (795 - 1.275mm) incl. wall mounting and fixing material