


**Cosmetic mirrors**

**17612019006 Cosmetic mirror**

**PRODUCT**



**DRAWING**

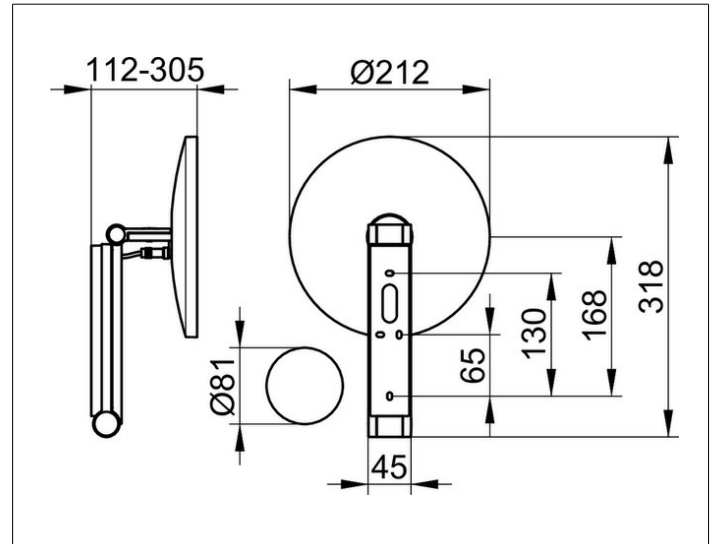

**PRODUCT ATTRIBUTES**

illuminated, 5-stage adjustable light colour from 2700 kelvin (warm white) to 6500 kelvin (daylight), glass control panel, in-wall cable layout, on pivoted rail adjustable in three dimensions, one-sided mirror, magnification factor x 5  
Operation:

Glass control panel with capacitive touch sensor and LED-display, DALI controlled

Power supply:

Mains connection via wall socket, 12 V in-wall adapter, input 220-240 V, standby consumption: < 0,5 watt

Illumination:

LED 4,5 watt (lifespan > 50.000 hours)

EEK: D , 4,5 kWh/1000h

**SURFACE**

chrome-plated

**DIMENSION**

2 Lichtfarben, o. Kabel, DALI